



Pete -1235, 1235SQ, 1236,
1263SQ, 1237, 1237SQ




1 x driver
side visor

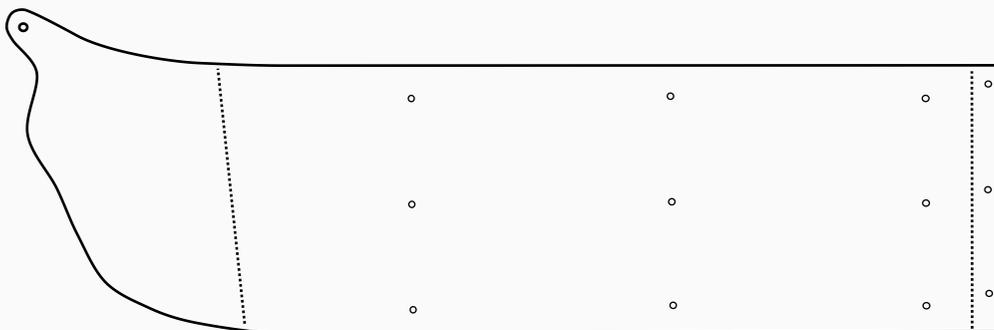

1 x passenger
side visor

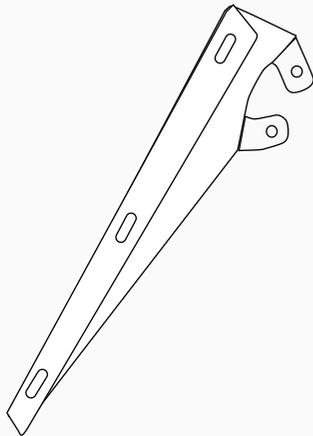

3 x passenger side
brackets

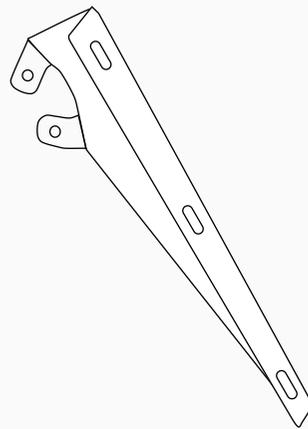

3 x driver side
brackets

Bolt Kit

	QTY: 21	S. S. 1/4 - 20 Phil truss machine SCR 3/4
	QTY: 54	Zinc 1/4 USS Flat washer
	QTY: 12	S. S. 1/4 - 20 Tap bolts 1 1/4
	QTY: 21	Zinc 1/4 Nylon lock nuts 20
	QTY: 12	J1420 well nuts

Pete -1235, 1235SQ, 1236, 1263SQ, 1237, 1237SQ

Step 1
Remove original visor & grind off original brackets from truck. Grind the "Huck Bolt" to be able to remove the visor brackets. **Be very Careful** on how you position the Grinding blade. You don't want the blade to touch your cab just the Huck Bolt.

Step 2
Assemble the visor w/ all the brackets. Mount the visor using the original side screws. Measure & balance the visor to where it sits evenly on the truck. If the brackets fit on the original holes for the cab then you can use those holes to mount the new brackets. If not then you will have to drill new holes & silicone or patch the old holes. Drill out the "Huck" holes w/ a 1/2 drill bit. Put tape 1 inch away from the tip to use as a stop (So you don't drill through your cab). If no side holes are present then drill those out first before anything else. Make sure the visor is fully assembled before marking holes for new brackets or side holes.

Step 3
Mount new brackets & tighten them on to the truck. Do not over tighten.

Step 4
Place the visor over the brackets & tighten all the screws. Starting with the sides, then the middle & then the rest. It is normal that the holes don't line up & might be 1 inch away from lining up. We make sure the visor don't move while driving. Move the bracket towards the visor holes and place in the screws. You might need a screw driver to help w/ lining up the holes.

Notes

- Use silicone or something similar to patch any exposed holes once installation is completed.
- Drill cautiously to avoid puncturing the cabs interior.
- Insert screws "loosely" starting W/ side screws, then the middle & then the rest.

Step 5
You are finished! Remove plastic from the visor & clean finger stains with Windex.

