

INSTALLATION OF RW626SC BAND MOUNT SPRING CLIP & HIGH HAT FOR AXLES WITH 5¼" BOLT CIRCLE

VERY IMPORTANT!

Read And Understand These Steps Before Installation.

TOOLS NEEDED

Standard Screwdriver or 5/16" Nut Driver

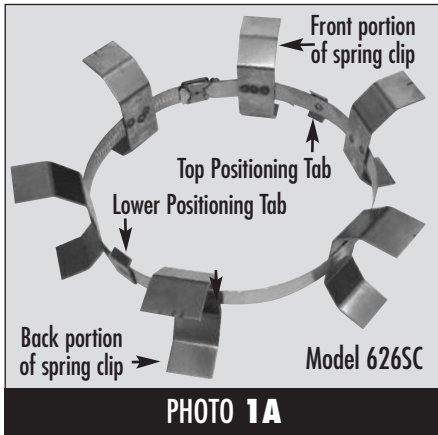


PHOTO 1A

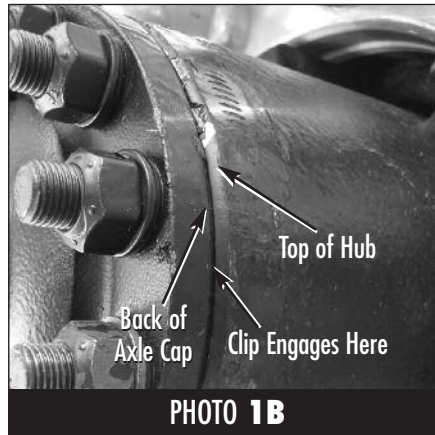


PHOTO 1B

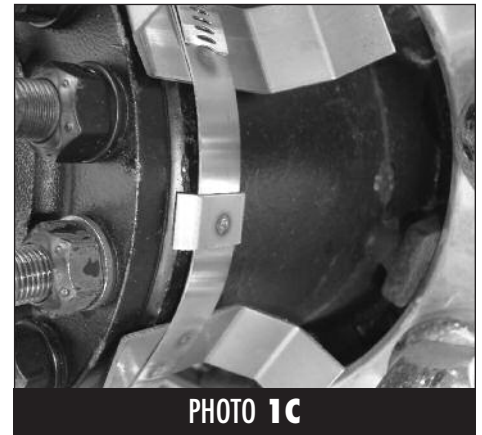


PHOTO 1C



PHOTO 1D

Step 1. Position The Band Spring Clip Onto The Hub

Verify that you have the proper band spring clip RW626SC, it should look like the picture (See Photo 1A). Next look at the hub, you will notice this particular hub is completely smooth. (See Photo 1B) **Note:** If it was a hub with high and low points you would position the band spring clip so that the clips are on top of each high point of the hub. In this case, the hub is completely smooth, and the position of the clips is determined by the two positioning tabs (upper and lower), that should engage between the back of the axle cap and the front of the hub (See Photo 1C). In addition to verify that the band spring clip is in the proper position spring clips should line up with the axle nuts and studs (See photo1D).

Continued On Backside...



PHOTO 2A


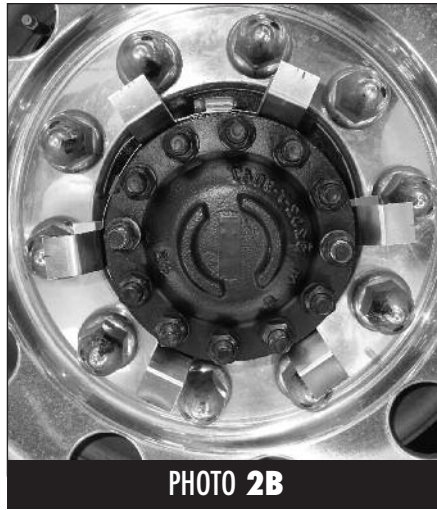


PHOTO 2B

Step 2. Tightening The Band Spring Clip To The Hub

Hold the band spring clip in its proper position and begin tightening the band with a 5/16" nut driver (See Photo 2A). **Note:** As you continue to securely tighten it down, make sure the positioning tabs and the spring clips are still in the proper position on the hub. Continue tightening until the band spring clip is now securely tight to the hub (See photo 2B).

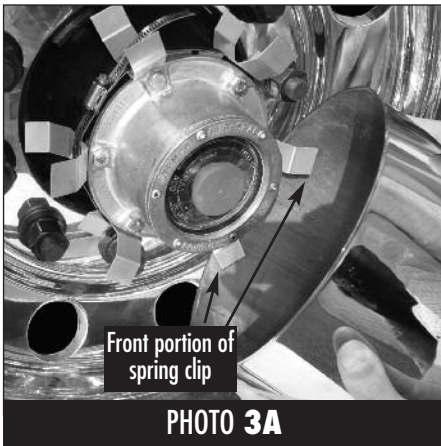

Front portion of spring clip

PHOTO 3A



PHOTO 3B



Edge of Back Portion of Spring Clip

PHOTO 3C

Step 3. Installing The High Hat

Start by tilting the high hat upward, and begin sliding it onto the front portion of the spring clips until it is completely on all six of the front spring clips (See Photo 3A & 3B). Once the high hat is close to the edge of the back portion of the spring clip (See Photo 3C) you can then pound on the face of the high hat with the palms of your hands until the high hat bottoms out onto the wheel. You are finished (See Photo 3D).



PHOTO 3D

REMOVAL OF BAND MOUNT SPRING CLIP HIGH HATS



PHOTO A



PHOTO B



PHOTO C



PHOTO D

- Using two hands grab on the top portion of the high hat and with a quick motion pull downward. (See Photo A)
- Then reverse your hands to the bottom of the high hat and with a quick motion pull upward and outward. (See Photo B)
- Continue alternating your hands from top to bottom always pulling away with each downward and upward motion, until the high hat releases completely from the spring clips. (See Photos C and D)